

# babyplast

## The System



The micro injection molding machine



CONTACT FOR NORTH AMERICAN  
SALES AND TECHNICAL SUPPORT:

PH: 909.941.0600 • Email: [info@albaent.com](mailto:info@albaent.com)  
[www.ALBAGENT.com](http://www.ALBAGENT.com)

The ideal machine for the  
production of micro parts  
Suitable for all types of *thermoplastic materials* up to **420°C**, metals (MIM),  
ceramic (CIM), wax. PEEK & CO

Micro-injection molding machine 6/10P

Maximum performance minimum space

### The smallest but greatest

Babyplast 6/10P is one of the smallest, fully hydraulic, injection molding machines. Thanks to the unique concept of the machine platens which act as mold bolsters, the cost and dimensions of the molds are reduced considerably. Babyplast 6/10P occupies less than 0,6m<sup>2</sup> of floor space and is extremely quiet (< 68dB)

### Precision

Babyplast 6/10P Guarantees the highest precision thanks to the injection piston and pre-plastification of the material.

To obtain the optimum volume of material, there are 5 interchangeable pistons available. It is also possible to move the injection unit off center




### User friendly

- Touch screen color display.
- Easy to consult pages and user friendly display
- Handles and stores over 100 tool settings
- Back-up on USB memory drive
- Record of last 20 cycles
- Ethernet connections: modbus TCP

Standard mold parts




Rotating table for 2 shot applications



Fixed platen



The difference between Babyplast (left) conventional (right)

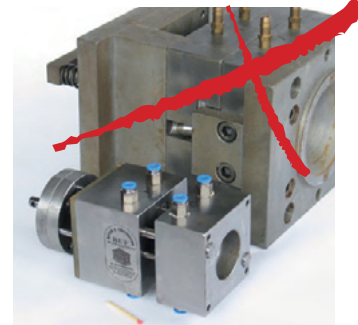



## Applications:

- Production of small precision parts
- Long and short production runs
- Laboratory tests / sample production
- Prototyping
- Medical products / clean room applications
- Technical training

## Machine with accessories

- Bench
- Chiller
- Drier
- De-humidifier
- Temperature controller max. 90°C.
- Sprue separator

Foot print of only 0,7 mq.



The difference:



## Included:

- Quality control (Cycle time/cushion/injection time)
- Automatic shut down in case of alarm
- De-compression
- Two injection pressures
- Possibility for off center injection
- Temperature tolerance band
- PID temperature control
- Stand-by temperature
- Speed control on all movements
- Mold safety
- 2 clamp speeds
- Central ejector with up to 9 strokes
- Speed and pressure control on ejector
- Removable tie bars
- Ejector return sensor
- Easy to consult pages and user friendly display
- Multi-lingual
- Handles and stores over 100 tool settings
- Part counter – settings for production batches
- Integrated 4 zone cooling water manifold
- USB socket
- Intrusion programme
- Hour meter
- Sprue break
- Injection and clamp positions monitored via transducers
- Electronic transducer for pressure control
- Inverter for motor speed control
- Color touch screen display.
- 4th zone for mold temperature control


## Optional:

- Mixer nozzle (static mixer)
- Euromap 67
- Accumulator for injection speed.
- Shut off nozzle
- Nozzle with tip for injecting directly into part.
- 5th mold heater zone
- Hydraulic or pneumatic core pull
- Ethernet modbus
- Interface for second injection unit for 2 shot applications
- LSR injection unit
- Rotating table
- Air blow
- Cooling ring for moving platen
- Special spec. For high temperature materials
- Hot runners
- Output for wiper arm to reject parts


## Accessories:

- Bench with space for chiller
- Drier
- Loader for plastic materials (electric or Venturi)
- Temperature controller for molds
- Sprue separator
- Electrical cabinet for accessories
- Set of drawers for molds


## Micro-injection molding machine 6/10P technical data

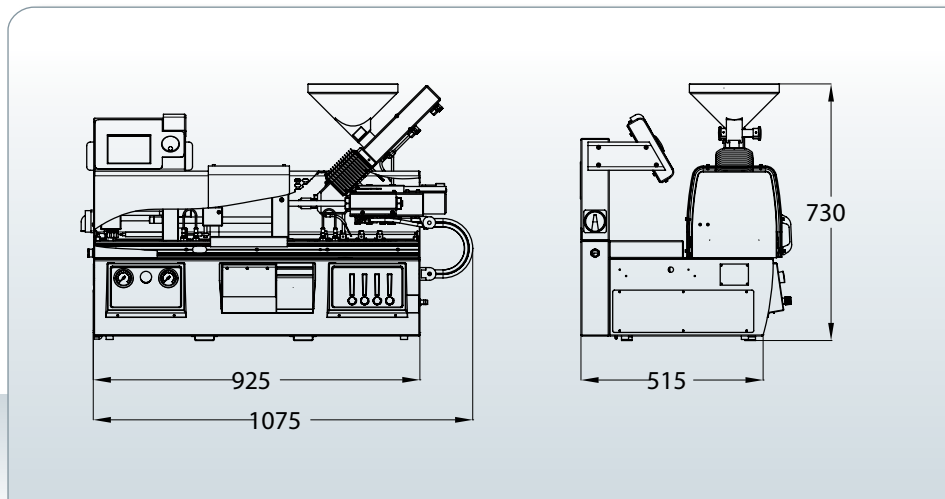

### Dimensions of machine platens

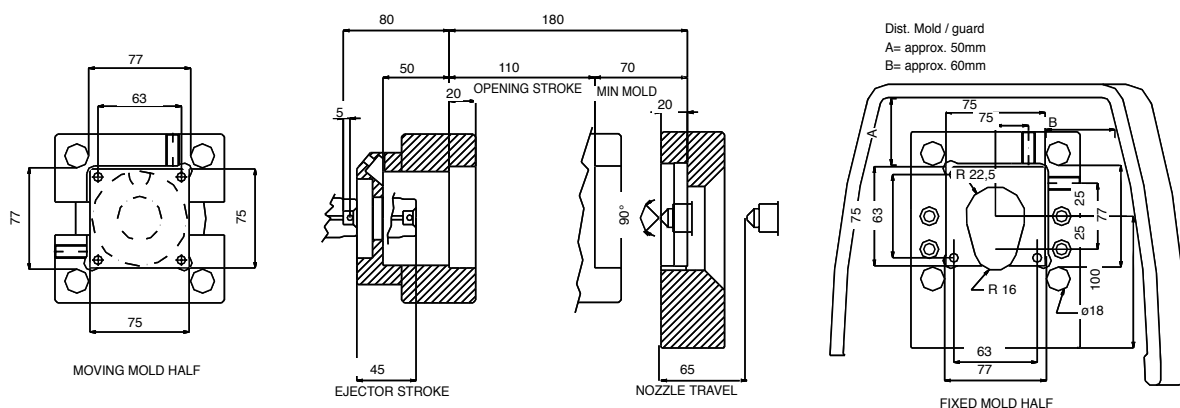

### Mold dimensions

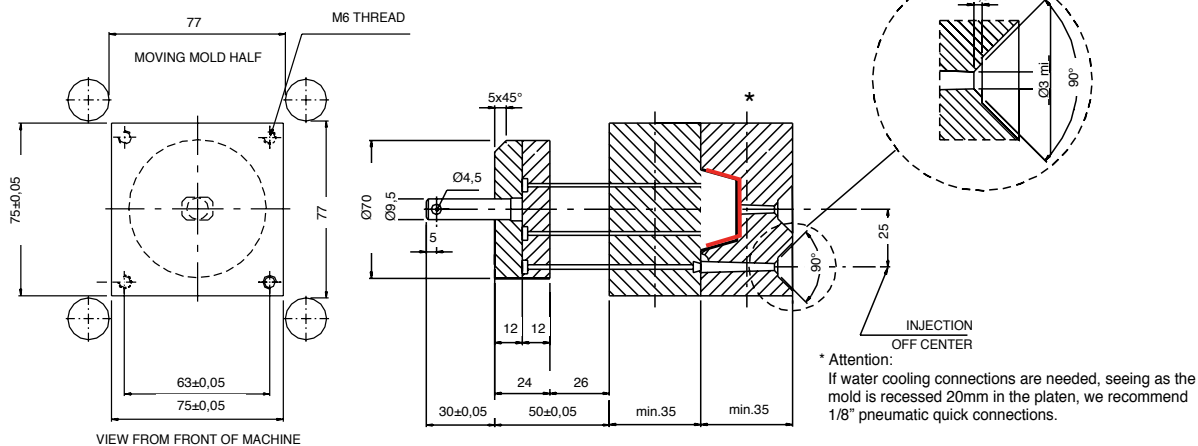

Piston diameter (mm):	10	12	14	16	18
Injection volume (cm3):	4	6,5	9	12	15
Injection pressure (bar):	2030	1850	1340	1030	815
Clamping force:	62 kN				
Min. dist. between platens:	30 mm (55 mm)*				
Max. dist. between platens:	140 mm (165 mm)*				
Opening stroke:	110 mm				

\*Possible by moving spacers

Ejector force:	7,4 kN
Ejector stroke:	45 mm
Oil tank capacity:	16 l
Power consumption:	3 kW
Weight:	150 kg
Mold dimensions:	75 x 75 x 70 mm (min.)
Power supply:	400 V 50 Hz